


X3e


Key Features

- Optional Dual Preview Streaming Module
- Modular Design throughout for input and output
- Hot swap input and output modules
- Preview 16 inputs
- 4K/2K EDID Management
- Multiple operation modes
- Support for 3D signal input and output
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

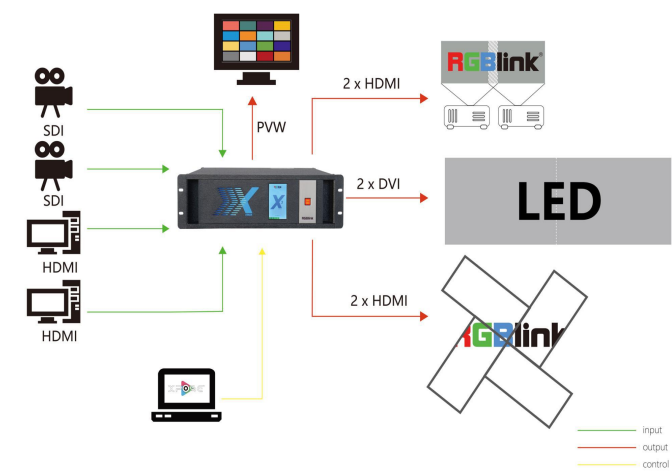

Dimensions

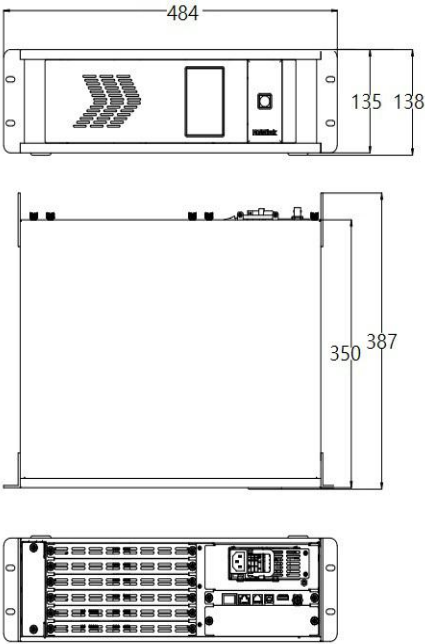

Order Codes

Product Code	Item
310-0003-16-0	X3e
190-0003-01-0	Quad DVI Input Module
190-0003-02-0	Quad HDMI Input Module
190-0003-03-0	Quad VGA Input Module
190-0003-04-0	Quad 3G-SDI(SCALE) Input Module
190-0003-06-0	Quad CVBS Input Module
190-0003-07-0	Quad USB Input Module
190-0003-11-0	4K@30hz Input Module
190-0003-13-0	Quad H.264 Input Module
190-0003-18-0	Quad HDMI (Deinterlace) Input Module

Product Code	Item
190-0003-21-0	Quad 2K DVI Output Module
190-0003-22-0	Quad 2K HDMI Output Module
190-0003-25-0	Quad HDBaseT Output Module
190-0003-28-0	ARO Rotation Module
190-0003-33-0	PVW Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject tochange or alteration without notice.



Specification

Connectors	Input	4 slots, up to 16 inputs Select from <div>4K@30 Module2 x DVI-I 2x HDMI-A (1 In/1 Loop) 2x DisplayPort (1 In/1Loop)</div> <div>3G SDI Module4 x BNC</div> <div>HDMI Module4 x HDMI-A</div> <div>DVI Module4 x DVI-I</div> <div>H.264 Module4 x RJ 45</div> <div>HDBaseT Module4 x RJ 45</div> <div>VGA Module4 x DB15</div> <div>CVBS Module8 x BNC (4In/4Backup)</div> <div>USB Module4 x USB Type</div>	
	Output	2slots, up to 8 outputs Select from <div>HDMI Module4 x HDMI-A</div> <div>DVI Module4 x DVI-I</div> <div>HDBaseT Module4 x RJ 45</div> <div>ARO Rotation Module4 x DVI</div>	
	PVW	1 slot	PVW Module2 x DVI 1 x RJ 45
	Communication		1 x RJ 45RJ 45 1 x RS 232RS 232 1 x USBUSB 1 x HDMIHDMI-A 1 x Genlock Y 1 x Genlock LoopBNC
	Power	2 slots	Up to 2 power InputsIEC
	Performance	Input Resolutions	SDI SMPTE480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.98/24/25/29.97/30 2160p@23.98/24/25/29.97/30/50/59.94/60 DVI HDMI HDBaseT USB SMPTE480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60 1920x1200@60 2048x1152@60 2560x816@60 CVBS SMPTE480i 576i VGA VESA800x600@60 1024x768@60 1280x1024@60 1440x900@60 1600x1200@60 1920x1080@60 H.264 176 x 144 240 x 180 320 x 180 320 x 240 320 x 256 352 x 228 352 x 480 400x224 400 x 320 480 x 270 480 x 272 480 x 320 480 x 360 480 x 480 544 x 480 608 x 448 640 x 360 640 x 480 704 x 576 720 x 404 720 x 480 720 x 540 720 x 576 850 x 480 1024 x 576 1280 x 720 1680 x 1056 1920 x 1080 HDMI 1.4 DisplayPort SMPTE480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30 VESA800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60 3840 x 2160@24 3840 x 2160@25 3840 x 2160@30
Output Resolutions		Select from below or configure customized DVI HDMI HDBaseT USB SMPTE720p@50/59.94/60 1080p@50/59.94/60 VESA800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60 PVW H.264 176 x 144 240 x 180 320 x 180 320 x 240 320 x 256 352 x 228 352 x 480 400x224 400 x 320 480 x 270 480 x 272 480 x 320 480 x 360 480 x 480 544 x 480 608 x 448 640 x 360 640 x 480 704 x 576 720 x 404 720 x 480 720 x 540 720 x 576 850 x 480 1024 x 576 1280 x 720 1680 x 1056 1920 x 1080	
Supported Standard		SDI HDMI DVI	SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI 1.4 Dual Link
Grey Level		12 bit	
Color Space		4:4:4	
Power		Input Voltage	AC 100V-240V, 50/60Hz
		Max Power	205W
Enviroment		Temperature	0℃～55℃
	Hudmidity	10%~90%	
Physical	Weight	Net12.3kg Package20.4kg	
	Dimension	Net485mmx387mmx135mm Package635mmx545mmx275mm	

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject tochange or alteration without notice.

RGBlink®

www.rgblink.com

