


X3p






Key Features

- Optional Dual Preview Streaming Module
- HDR Compatible
- Modular Design throughout for input and output
- Hot swap input and output modules
- 4K@60 inputs compatible including HDMI 2.0, DisplayPort1.2
- Up to 12G-SDI Input option
- Preview 16 inputs
- 4K/2K EDID Management
- Multiple operation modes
- Support for 3D signal input and output
- Control via XPOSE and T series consoles
- Redundant hot swap PSU option

Application

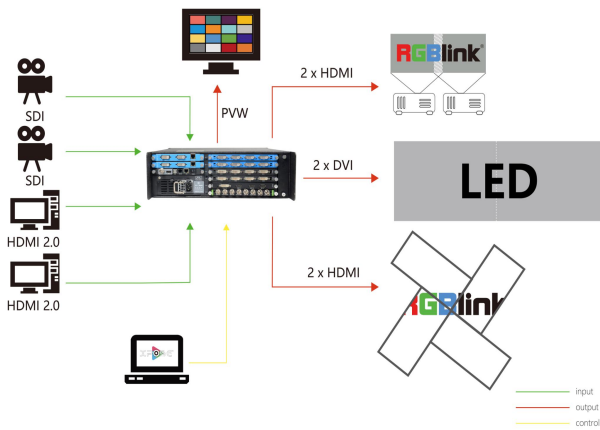

Dimensions

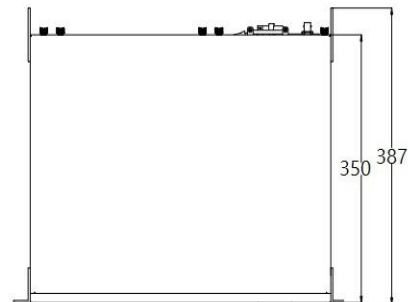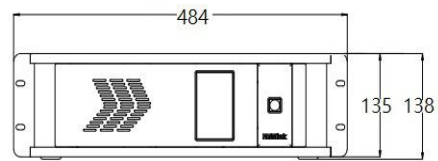

Order Codes

Product Code	Item
310-1003-00-0	X3p
310-1003-11-0	X3p (Standard with PVW)
190-0003-01-0	2K DVI Input Module
190-0003-02-0	2K HDMI Input Module
190-0003-03-0	VGA Input Module
190-0003-04-0	3G-SDI Input Module
190-0003-06-0	CVBS Input Module
190-0003-07-0	USB Input Module
190-0003-11-0	4K@30 Digital Input Module
190-0003-15-0	4K@60 Digital Input Module

Product Code	Item
190-0003-18-0	HDBaseT Input Module
190-0003-13-0	H.264 Streaming Input Module
190-0003-17-0	12G-SDI Input Module
190-0003-21-0	2K DVI Output Module
190-0003-22-0	2K HDMI Output Module
190-0003-24-0	3G SDI Output Module
190-0003-25-0	HDBaseT Output Module
190-0003-28-0	2K DVI ARO - Advanced Rotation
190-0003-33-0	PVW Module

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgblink.com
 Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

RGBlink[®]

www.rgblink.com



Specifications are correct at time of printing and subject to change or alteration without notice.

Specification

Connectors	Input	4 slots, up to 16 inputs Select from	4K@60 Module 12G SDI Module 3G SDI Module HDMI Module DVI Module H.264 Module HDBaseT Module VGA Module CVBS Module USB Module	1 x DVI 2 x HDMI 2 x DisplayPort 4 x BNC 4 x BNC 4 x HDMI 4 x DVI 4 x RJ 45 4 x RJ 45 4 x VGA 8 x BNC 4 x USB
	Output	2 slots, up to 8 outputs Select from	3G SDI Module HDMI Module DVI Module HDBaseT Module DVI Advanced Rotation Module	4 x BNC 4 x HDMI 4 x DVI 4 x RJ 45 4 x DVI
	PVW	1 slot	PVW Module	2 x DVI 1 x RJ 45
	Communication		1 x RJ 45 1 x RS 232 1 x USB 1 x HDMI 1 x Genlock Y 1 x Genlock Loop	RJ 45 RS 232 USB HDMI BNC
	Power	2 slots	Up to 2 power Inputs	IEC
Performance	Input Resolutions	SDI SMPTE 480i 576i 720p@50/60 1080i@59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 1080psf@23.98/24/25/29.97/30 2160p@23.98/24/25/29.97/30/50/59.94/60 DVI HDMI HDBaseT USB SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x1024@60 1600x1200@60 1920x1080@60 1920x1200@60 2048x1152@60 CVBS SMPTE 480i 576i VGA VESA 800x600@60 1024x768@60 1280x1024@60 1440x900@60 1600x1200@60 1920x1080@60 H.264 176 x 144 240 x 180 320 x 180 320 x 240 320 x 256 352 x 228 352 x 480 400x224 400 x 320 480 x 270 480 x 272 480 x 320 480 x 360 480 x 480 544 x 480 608 x 448 640 x 360 640 x 480 704 x 576 720 x 404 720 x 480 720 x 540 720 x 576 850 x480 1024 x 576 1280 x 720 1680 x 1056 1920 x 1080 HDMI 2.0 DisplayPort SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 2160p@30/50/60 VESA 800x600@60 1024x768@60 1280x768@60 1280x800@60 1280x1024@60 1360x768@60 1366x768@60 1400x900@60 1600x1050@60 1600x1200@60 1680x1050@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 1920x1200@60 2048x1152@60 2560x812@60 2560x816@60 2560x1600@60 3840x1080@60 3840x2160@23.98/24/25/29.97/30/50/60 4096x2160@60		
	Output Resolutions	Select from below or configure customized SDI SMPTE 480i 576i 720p@50/59.94/60 1080i@50/59.94/60 1080p@50/59.94/60 DVI HDMI HDBaseT SMPTE 720p@50/59.94/60 1080p@50/59.94/60 VESA 800x600@60 1024x768@60/75/85 1280x720@50/59.94/60 1280x800@60 1280x960@60 1280x1024@60/75/85 1400x1050@60 1600x1200@60 1920x1080@23.98/24/25/29.97/30/50/59.94/60 2048x1152@60 PVW H.264 176 x 144 240 x 180 320 x 180 320 x 240 320 x 256 352 x 228 352 x 480 400x224 400 x 320 480 x 270 480 x 272 480 x 320 480 x 360 480 x 480 544 x 480 608 x 448 640 x 360 640 x 480 704 x 576 720 x 404 720 x 480 720 x 540 720 x 576 850 x480		
	Supported Standard	SDI SMPTE ST 2082-1, SMPTE ST 2081-1, SMPTE ST 424, SMPTE ST 292-1, SMPTE ST 259, DVB-ASI,MADI HDMI 2.0 Dual Link DisplayPort 1.2		
	Grey Level	12 bit		
	Color Space	4:4:4		
Power	Input Voltage	AC 100V-240V, 50/60Hz		
	Max Power	205W		
Enviroment	Temperature	0℃~55℃		
	Hudmidity	10%~90%		
Physical	Weight	Nett	12.3kg	
		Packaged	20.4kg	
	Dimension	Nett	485x387x135mm	
		Packaged	635x545x275mm	

