


All-in-one Interactive Touch Device **eTILE 15M-II**


The eTILE 15M is an ultra-thin interactive all-in-one touch display, specially designed for commercial use in for example retail environments. With good integration possibilities because of its exterior and tamperproof design this eTILE can be integrated into any commercial setting.

A tamper proof commercial Full HD solution:

- + New generation AHVA Panel
- + Bright display (400 nits)
- + Robust PCT Panel; dust and waterproof (IP65)
- + Purposely built for 24/7 use in kiosk environments
- + Supports Intel® Broadwell U CPU
- + Tamper resistant because of cable management, hidden keypad and port cover
- + Handles high operation vibrations for use in harsh environments

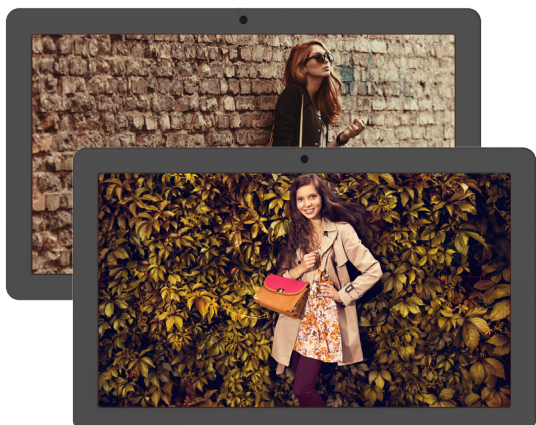

eTILE 15M-II

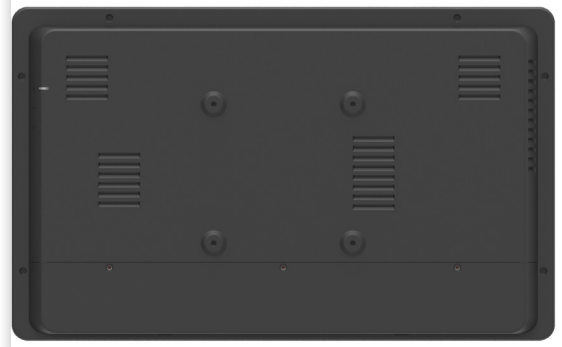

| Model name | | WT15M-FW |
|-------------------|------------------|---|
| Feature | | An ultra-thin, tamper proof interactive all-in-one touch display |
| Dimension | W x H x D (mm) | 384.5 x 234 x 36.45 mm |
| | W x H x D (inch) | 15.14 x 9.21 x 1.44 inch |
| Weight (Kg/Pound) | | 3.7 kg / 8.16 lbs (N.W.) |
| SoC | Type | Intel® Broadwell CPU i3-5010U |
| Memory | Channels | Dual Channel |
| | Type | DDR3L 2GB x 2 |
| | DDR | 1333 |
| | Max Memory | 8G |
| Graphics | Embedded | Intel® HD Graphics 5500 |
| Audio | Type | Max 7.1 Channel via HDMI Digital Analog 2 channels I/O |
| LAN | | Single Intel Gigabit Ethernet WGI218LM 10/100/1000 Mbps |
| Mass Storage | | Supports 14.2 mSATA Default 64G mSATA SSD |
| Touch Panel | | PCT Multi Touch Surface (10 point touch) Pencil Hardness = 7H per ASTM D3363 Pen Hitting: more than 20,000,000 times (loading 180g) |
| Speaker | | Built-in 2W Stereo Speakers |
| Webcam | | Built-in HD Webcam |

| Panel Specs | Resolution | 15.6" (1920 x 1080; 16:9) |
|-----------------------|---------------------|---|
| | Brightness | 400 nits |
| | Panel Type | AHVA |
| | View Angle | Horizontal: 178/178 Vertical: 178/178 |
| Side Panel I/O | Audio Line-Out | x 1 |
| | DC Jack | x 1 |
| | Mic/line in | x 1 |
| | HDMI Out Port | x 1 |
| | USB 3.0 Port | x4 |
| | RJ45 LAN Port | x 1 |
| | RJ50 Port | x 4 |
| | Antenna Hole | x2 |
| Adapter | | 90W (19V, 4.74A) AC Adapter |
| Watchdog Timer | | 1 sec~255 sec |
| IP Grade | | Front panel IP65 dust- & waterproof |
| Security | | Hidden Keypad Secure cable and port cover Concealed on/off controls |
| Accessories | | Wall Mount Kit, internal Wifi Antenna, Powercord. Other accessories available on request |
| Environment | | |
| Operating Temperature | | 0 ~ 40°C (32 ~ 104°F) |
| MTBF | | 50,000 hours |
| Storage Conditions | | -20 ~ 60°C (-4~140°F) 90% RH (40°C non condensing) |
| Vibrations | Operating Vibration | 1Grms, random, 10~500Hz, X, Y, Z, 3Axes, 0.5Hr/Axis |
| | Operating Shock | 8G, half sine, 11ms duration, 3Axes, 6Direction |

Supports:



AOPEN

Bright Ideas Connected

The specifications depicted may be subject to change without prior notice.
All trademarks are copyright of their respective owners. © AOPEN Inc.